

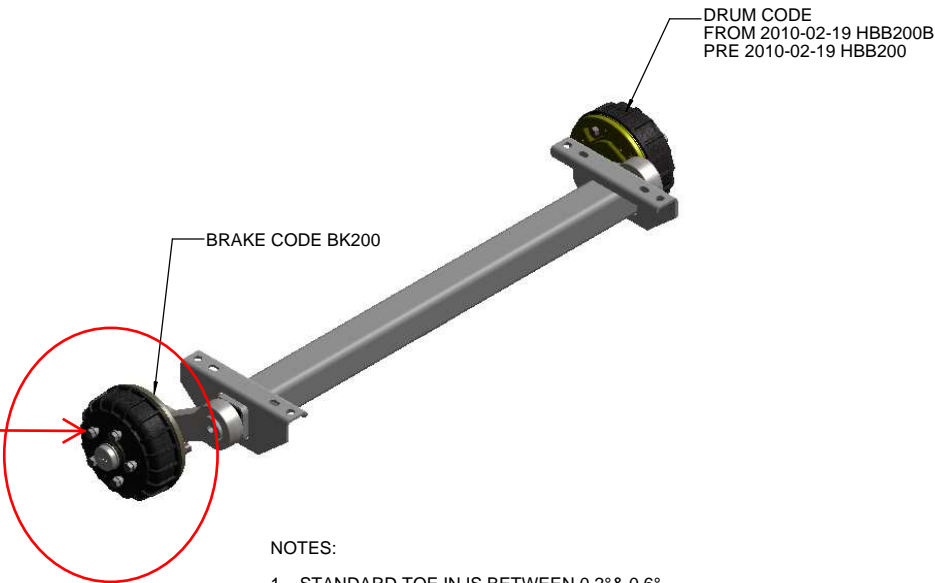


AMOUNT OF STUDS  
AND PCD REQUIRED

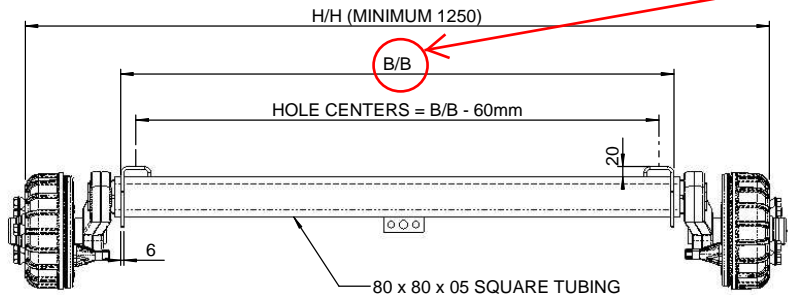

- NOTES:
- 1 STANDARD TOE IN IS BETWEEN 0.2° & 0.6°
  - 2 STANDARD CAMBER IS BETWEEN -0.6° TO -1.4°
  - 1 TANDEM TOE IN IS 0°
  - 2 TANDEM CAMBER IS BETWEEN -0.6° TO -1.4°

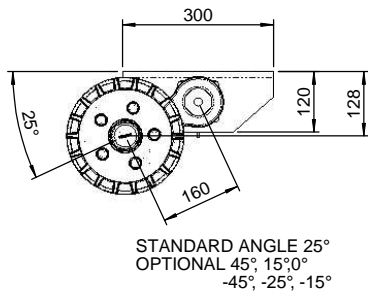

REQUIRED  
(NORMALY CHASSIS  
WIDTH)


© COPYRIGHT BURQUIP INTERNATIONAL (Pty) Ltd

TITLE:

PRODUCT:

ARC1200/1600-1

BURQUIP



SCALE: 1:10

SHEET: A3

DRAWING NO.

ARC1200-1600-1

REV

P2

DATE: 2007-06-26

SHEET 1 of 1

CHANGED BRAKE DRUM CODE FROM HBB200 SERIES TO HBB200B SERIES

DESCRIPTION OF CHANGE

ZONE

AUTH NO.

BY

DATE

ASSUME A TOLERANCE OF ±1mm FOR DIMENSIONS WITHOUT TOLERANCES ALL DIMENSIONS IN mm UNLESS OTHERWISE SHOWN

H.M.

H.M.

2010-02-19

H.M.

H.M.